

KALEİDO


Mozaik / Multideck
Serve-over




BEST ENERGY CLASS*




Product Categories




Cheese



Dairy products



Delicatessen



Fruit and Vegetables



Meat



Pastries



Pre-packed fruit and vegetables



Sandwiches



Chicken

Technical Features




High efficiency fans



LED lighting



Natural Defrost Plus



Remote condensing unit




Ventilated

Follow us on: by Epta

www.bonnetneve.com

Certification and Patents




Eurovent


Product Range

KALEİDO													
Lenght-Lunghezza Longueur-Länge-Longitud			mm	1250	1875	2500	3750	EOL1820	EOL2020	EOL2220	OC90	OC45	CC45
KALEİDO	DESIGN	S	H1200	•	•	•	•	•					
			H1400	•	•	•	•						
			H1600	•	•	•	•						
		E	H1200	•	•	•	•		•				
			H1400	•	•	•	•		•		•	•	•
			H1600										
		M	H1200	•	•	•	•			•			
			H1400										
			H1600	•	•	•	•					•	•
	STUDIO	S	H1200										
			H1400										
			H1600										
		E	H1200	•	•	•	•		•				
			H1400	•	•	•	•		•		•	•	•
			H1600										
		M	H1200	•	•	•	•			•			
			H1400										
			H1600	•	•	•	•					•	•
	STYLE	S	H1200										
			H1400										
			H1600										
		E	H1200	•	•	•	•		•				
			H1400	•	•	•	•		•		•	•	•
			H1600										
		M	H1200	•	•	•	•			•			
			H1400										
			H1600	•	•	•	•					•	•
Display area Superficie di appog- gio Warenpräsentations- fläche Surface d'expositon Superficie expostiva m2	Slim	H1200	1.29	1.94	2.57	3.86	2.3						
		H1400	1.27	1.92	2.54	3.81							
		H1600	1.52	2.29	3.05	4.56							
	Efficia	H1200	1.39	2.10	2.79	4.17		2.7					
		H1400	1.38	2.08	2.76	4.14		2.93		-	-	-	
		H1600											
	Modular	H1200	1.52	2.29	3.04	4.56			3.22				
		H1400									-	-	
		H1600	1,75	2,64	3.52	5.26							
Loading area Superficie di appog- gio Nutzfläche Surface de charge- ment Superficie de apoyo m2	Slim		1.17	1.76	2.35	3.52	1.76						
	Efficia		1.30	1.95	2.60	3.90		2.09		-	-	-	
	Modular		1.42	2.13	2.85	4.27			2.53		-	-	
End thickness Spessore spalla Stärke der Sei- tenwand Épaisseur de cheque poue Espesor lateral			30.00 (+ 30 Batticarrello/Bumper Rail/Pare-choc/Wagenstoßleiste/Parachoques)										


Cross Sections

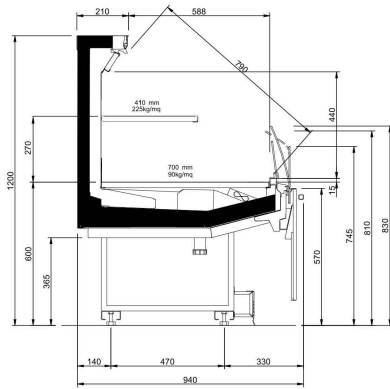


Batik 12 S Design

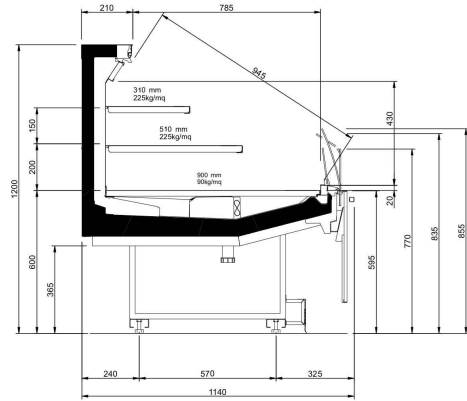


Batik 12 N Design

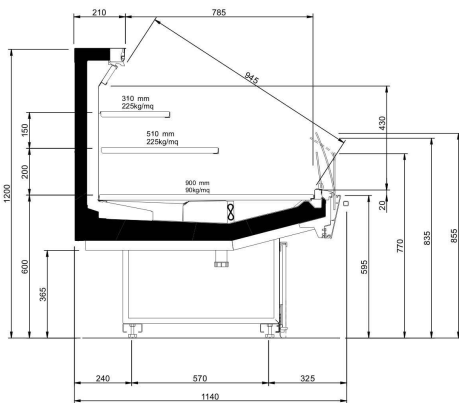


Batik 12 N Studio

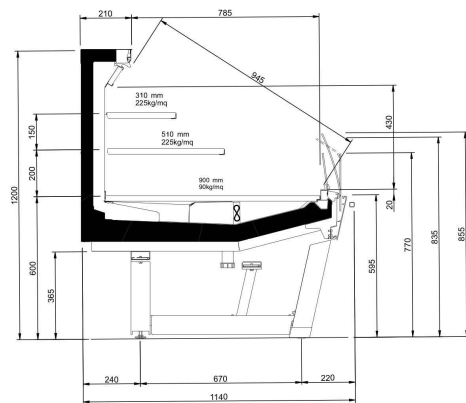


Batik 12 N Style

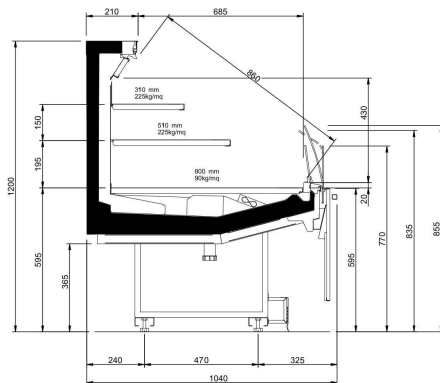


Batik 12 C Design

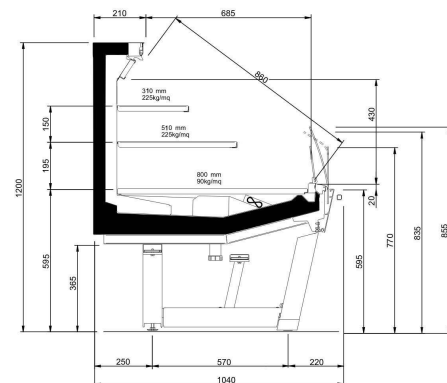


Batik 12 C Style

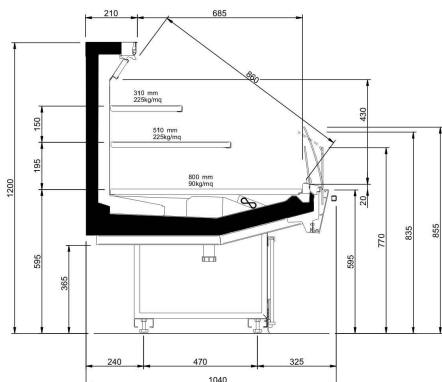


Batik 12 C Studio

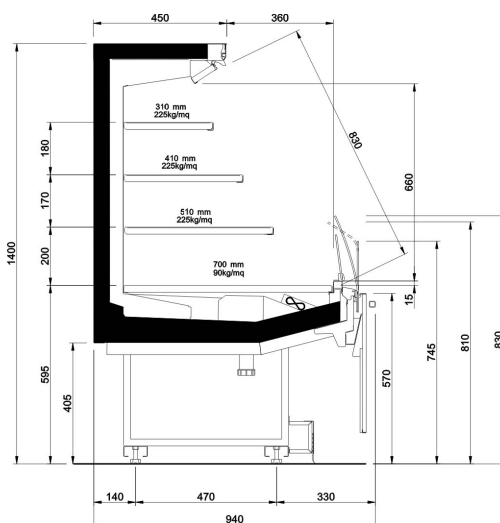


BATIK 14 S DESIGN

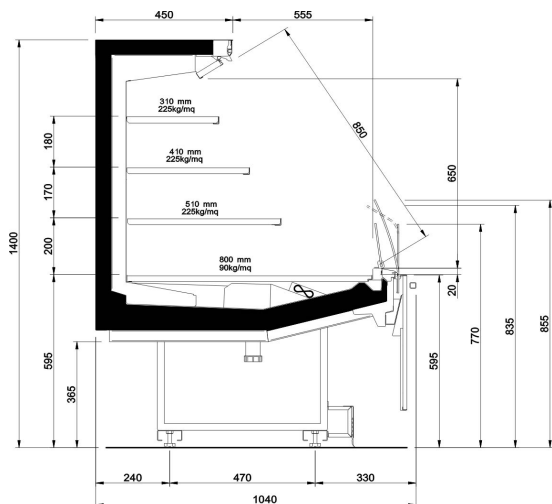


BATIK 14 C DESIGN

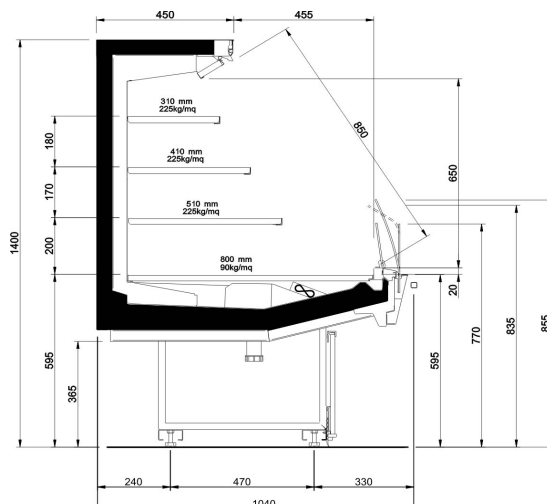


BATIK 14 C STUDIO

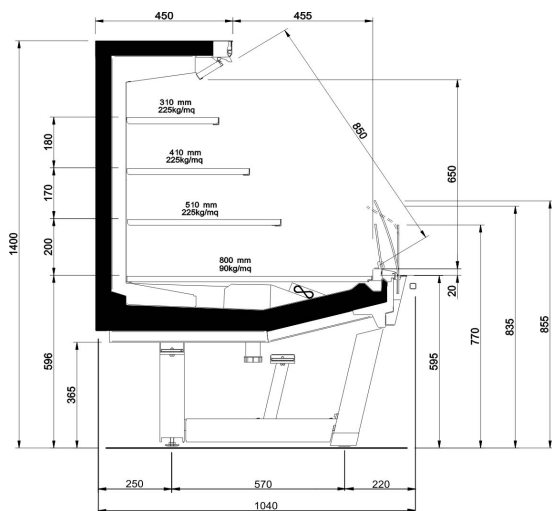


BATIK 14 C STYLE

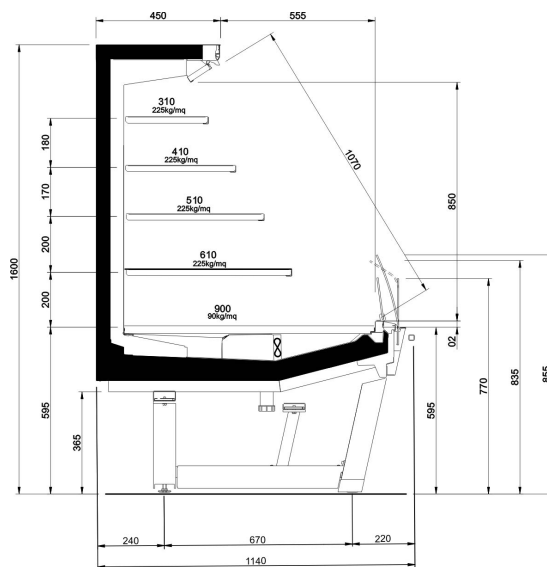


BATIK 16 N STYLE

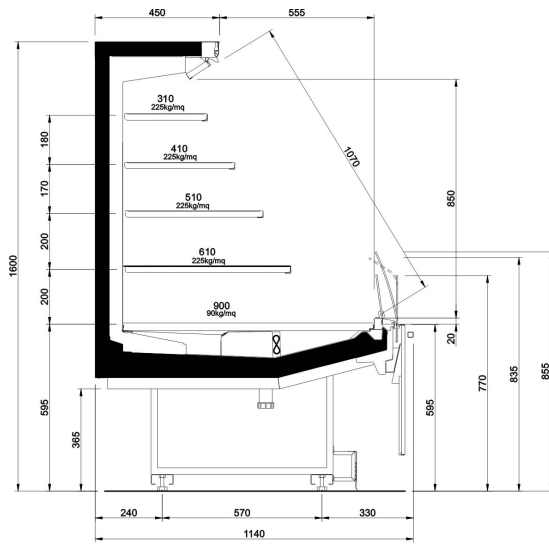

BATIK 16 N DESIGN

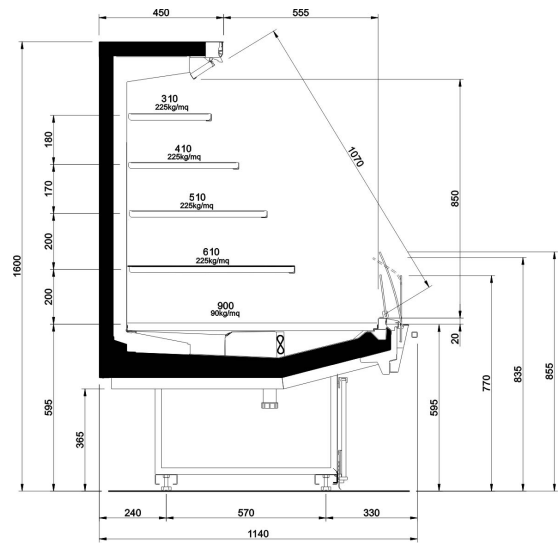

BATIK 16 N STUDIO

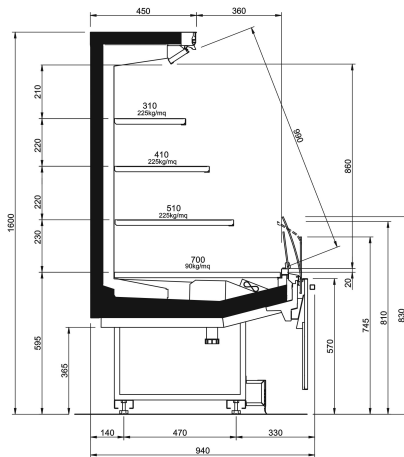

BATIK 16 SLIM DESIGN

*The information on the energy class (according to EU regulations 2019/2018 and EU 2019/2024) reported here refers to standard models and precise product configurations and set-ups. The site is based on the information available at the time of publication. As the energy class depends on the specific product configuration, despite the efforts made to ensure the greatest possible accuracy, the real data can differ significantly from the data declared here. For further information, we invite you to consult the European Product Database for Energy Labelling (EPREL) or to contact our Sales Office.