

SKYSPACE



SkyEffect / Multideck


Chilled Vertical and Semivertical




BEST ENERGY CLASS*




Product Categories



Cheese




Dairy products



Delicatessen



Fruit and Vegetables



Pre-packed fish



Pre-packed fruit and vegetables



Sandwiches



Chicken

Technical Features



Electric defrost




High efficiency fans



LED lighting



Off-cycle defrost



Remote condensing unit



Ventilated

Follow us on: [f](#) [y](#) [in](#) [ig](#) by Epta

www.bonnetneve.com

Certification and Patents









Eurovent

Product Range

SKYSPACE TILDED DOORS										
Length-Lunghezza Longueur-Länge-Longitud mm		1250	1875	2500	3750	EOL 1510	EOL 1810	EOL 1960	EOL 220	EOL 258
Height-Altezza-Hauteur-Höhe-Altura mm		H15	H15	H15	H15	H15	H15	H15	H15	H15
SKYSPACE TILTED DOORS	Efficia	•	•	•	•	•				
	Modular	•	•	•	•		•	•		
	Volum	•	•	•					•	•
Display area Superficie di esposizione Warenpräsentationsfläche Surface d'exposition Superficie expositiva m2	Efficia	1,35	2,00	2,70	4,05	2,34				
	Modular	1,35	2,00	2,70	4,05		2,81	2,97		
	Volum	1,35	2,00	2,70					3,39	3,81
Loading area Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m2	Efficia	0,92	1,35	1,85	2,75	1,17				
	Modular	1,10	1,65	2,2	3,3		1,68	1,77		
	Volum	1,31	1,97	2,62					2.31	2,70
End thickness Spessore spalla Stärke der Seitenwand Épaisseur de chaque joue Espesor lateral mm		21.00 (+ 35 Batticarrello/Bumper Rail/Pare-choc/Wagenstoßleiste/ Parachoques)					42.00 (+ 35 Batticarrello Bumper Rail/Pare-choc Wagenstoßleiste Parachoques)			

SKYSPACE SLIDING DOORS									
Lenght-Lungetzza Longueur-Länge-Longitud mm		1250		1875		2500		3750	
Height-Altrezza-Hauteur-Höhe-Altura mm		H15	H17	H15	H17	H15	H17	H15	H17
SKYSPACE SLIDING DOORS	Modular	•	•	•	•	•	•	•	•
	Volum		•		•		•		•
Dispaly area Superficie di esposizione Warenpräsentationsfläche Surface d'exposition Superficie expositiva m2	Modular	1,30	1,80	1,93	2,66	2,61	3,59	3,91	5,39
	Volum		1,92		2,84		3,83		5,75
Loading area Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m2	Modular	1.10		1,65		2,2		3,3	
	Volum	1.31		1,97		2,62		3,93	
End thickness Spessore spalla Stärke der Seitenwand Épaisseur de chaque joue Espesor lateral	21.00 (+ 35 Batticarrello/Bumper Rail/Pare-choc/Wagenstoßleiste/Parachoques)								

Cross Sections

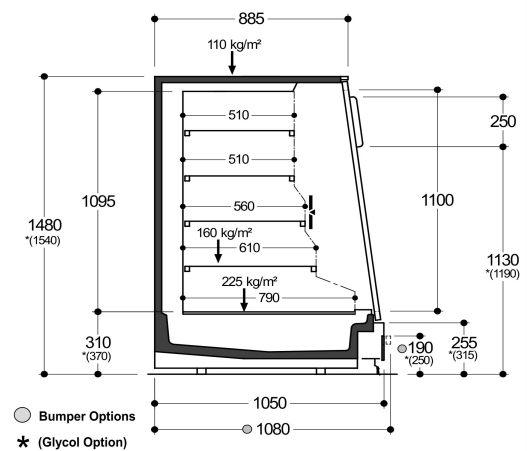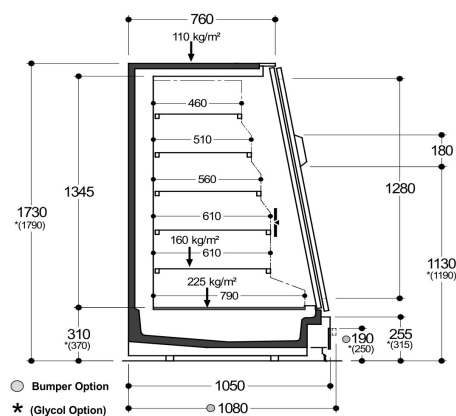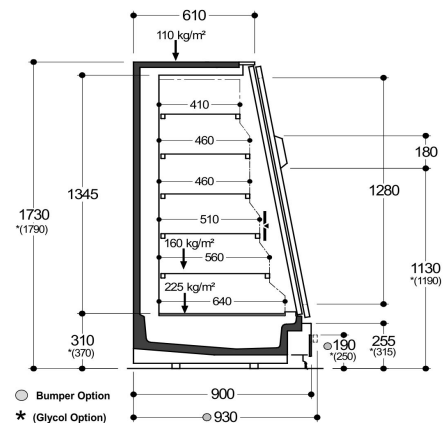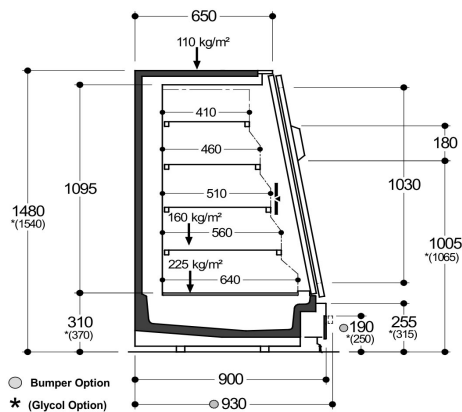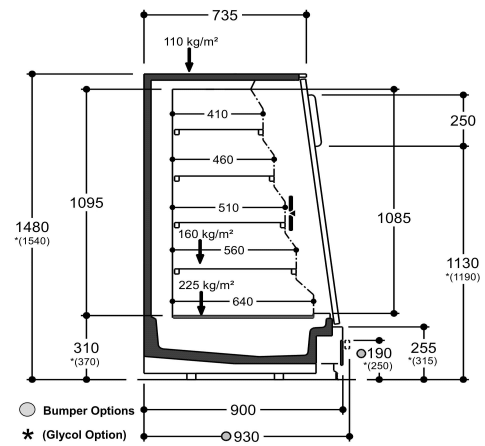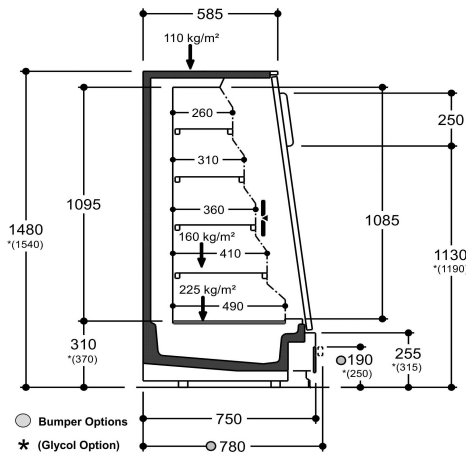

*The information on the energy class (according to EU regulations 2019/2018 and EU 2019/2024) reported here refers to standard models and precise product configurations and set-ups. The site is based on the information available at the time of publication. As the energy class depends on the specific product configuration, despite the efforts made to ensure the greatest possible accuracy, the real data can differ significantly from the data declared here. For further information, we invite you to consult the European Product Database for Energy Labelling (EPREL) or to contact our Sales Office.