

SKYVIEW PLUS

SkyEffect / Multideck


Chilled Vertical and Semivertical




BEST ENERGY CLASS*




Product Categories



Cheese



Dairy products




Delicatessen



Fruit and Vegetables



Meat



Pre-packed fish



Pre-packed fruit and vegetables



Chicken

Technical Features



Electric defrost



EPTABLUE




High efficiency fans




LED lighting



Off-cycle defrost



Remote condensing unit



Ventilated

SKYVIEW PLUS



SkyEffect / Multideck

Chilled Vertical and Semivertical

Certification and Patents



Eurovent



Epta
DualAirflow




HighFlux


Product Range

SKYVIEW PLUS																																	
Lenght- Lunghezza Longueur- Länge- Longitud mm			1250		1875		2500		3750		TG1510 Open		TG1510 Open		TG1370 Open or Closed		TG1810 Open or Closed		TG2000 Open or Closed		TG2200 Open		TG1510 Open		TG1330 Open		TG1810 Open		TG1960 Open		TG1960 Open		
Altezza mm			20	22	20	22	20	22	20	22	20	22	20	22	20	22	20	22	20	22	20	22	20	22	20	22	20	22	20	22	20	22	
SKYVIEW PLUS	Closed	C	•	•	•	•	•	•	•	•																							
		N	•	•	•	•	•	•	•	•					•	•			•	•													
		L	•	•	•	•	•	•	•	•									•	•													
	Open	C	•	•	•	•	•	•	•	•	•														•								
		N	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•	•	•			•	•		•	•	•		
		L	•	•	•	•	•	•	•	•	•							•	•	•	•	•	•	•				•	•			•	•
Display area Superficie di esposizione Warenpräsentat- ionsfläche Surface d'exposition Superficie expositiva m2	Closed	C	3.16	3.42	3.68	3.99	4.21	4.56	6.32	6.84	2.26	2.48																					
		N	3.33	3.59	3.88	4.19	4.44	4.79	6.67	7.19				3.38	3.63	2.84	3.17	4.49	4.82	3.67	4.10												
		L	3.42	3.68	3.99	4.35	4.56	4.91	6.84	7.34						2.92	3.25	4.91	5.29	3.77	4.21												
	Open	C	3.39	3.67	3.95	4.28	4.52	4.90	6.78	7.35	3.42													3.87									
		N	3.39	3.67	3.95	4.28	4.52	4.90	6.78	7.35						4.38										3.69	4.00	4.76	4.82	5.23			
		L	3.49	3.77	4.07	4.39	4.65	5.02	6.97	7.63																			4.85	5.25			5.27
Loading area Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m2	Closed	C	1.35		1.6		1.85		2.75		1.21	1.21																					
		N	1.65		1.92		2.20		3.30					1.23		1.58		1.77		2.04													
		L	1.95		2.27		2.60		3.90							1.58		2.08		2.04													
	Open	C	1.35		1.6		1.85		2.75		1.21													1.21									
		N	1.65		1.92		2.20		3.30							1.58										1.23		1.58		1.77			
		L	1.95		2.27		2.60		3.90																			1.58				2.08	
End thickness Spessore spalla Stärke der Seitenwand Épaisseur de chaque joue Espesor lateral mm			30.00 (+ 35 Bumper Rail)																														


Cross Sections

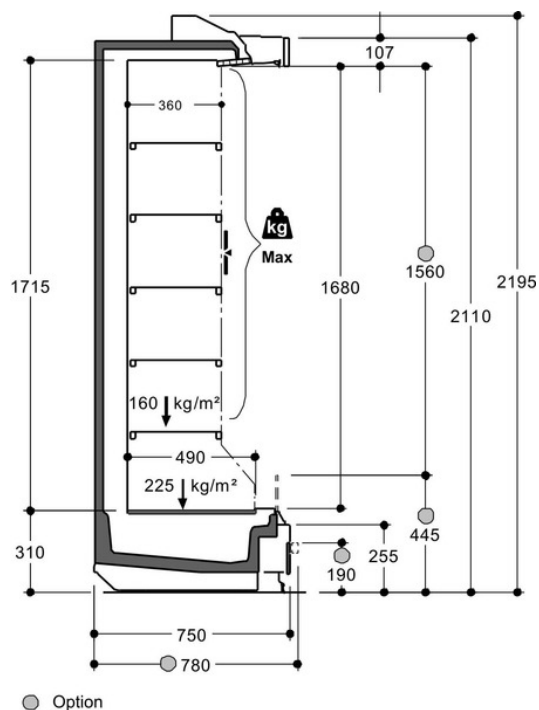


Open_20_C

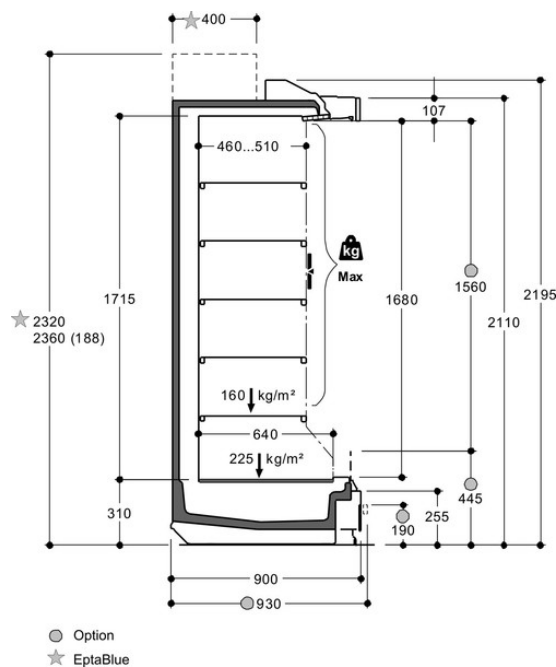

Open_20_N

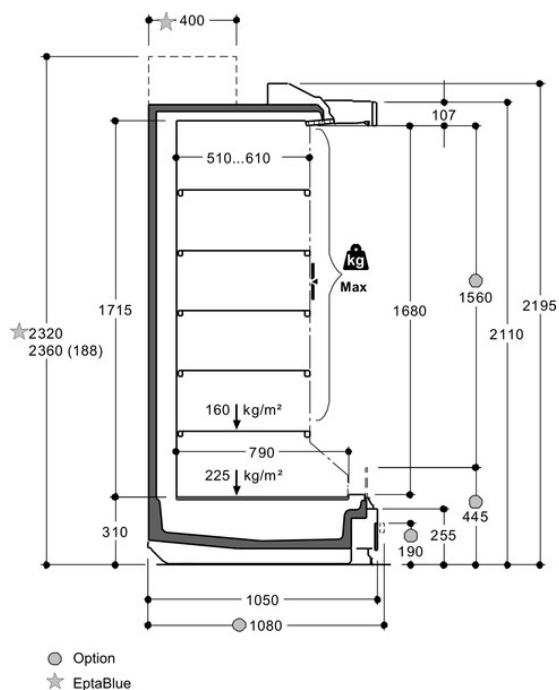

Open_20_L

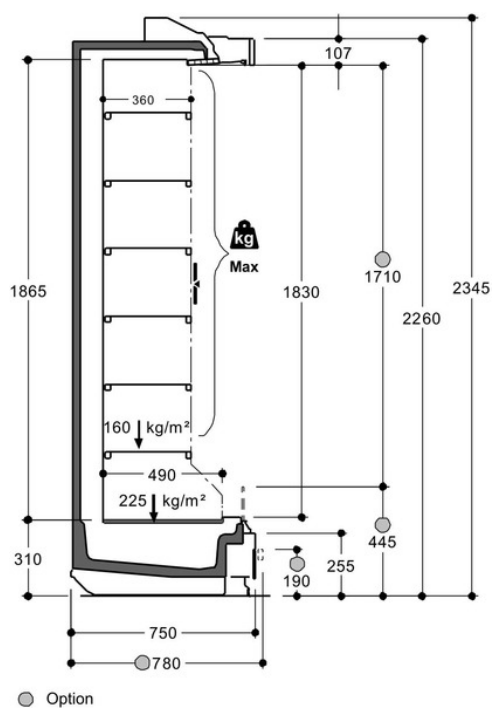


Open_22_C


SKYVIEW PLUS

SkyEffect / Multideck


Chilled Vertical and Semivertical

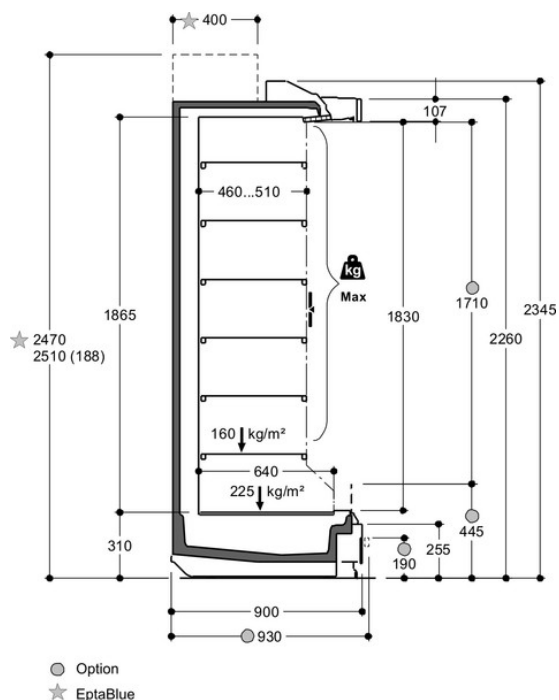


Open_22_N

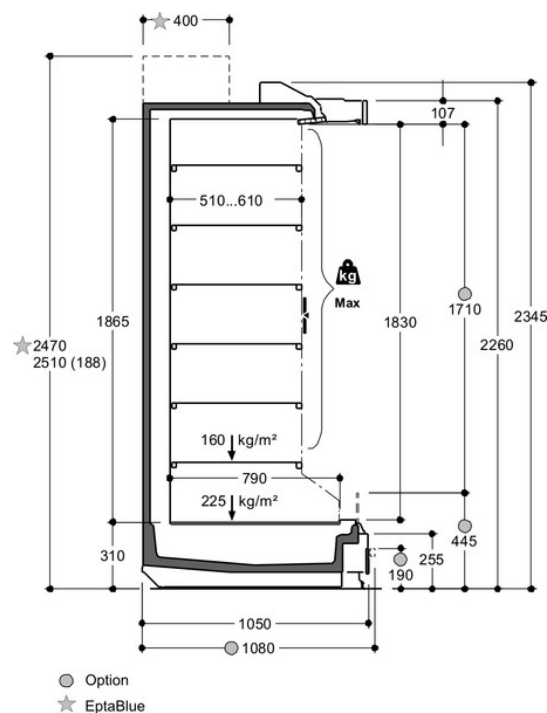

Open_22_L

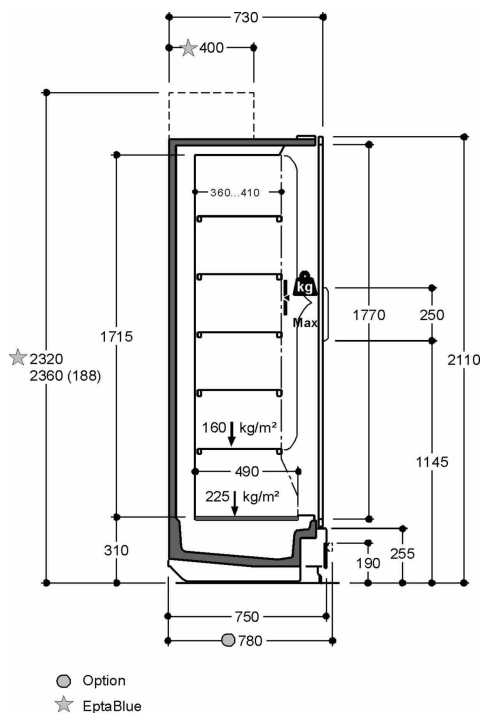

20 C CLOSED

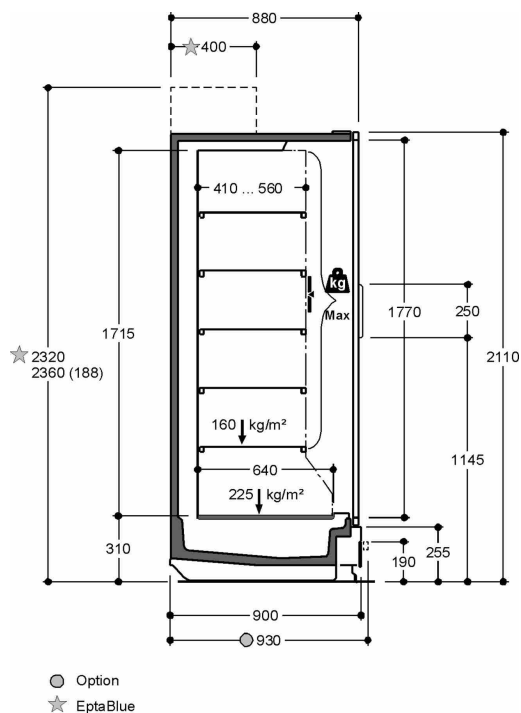


20 N CLOSED

SKYVIEW PLUS


SkyEffect / Multideck

Chilled Vertical and Semivertical

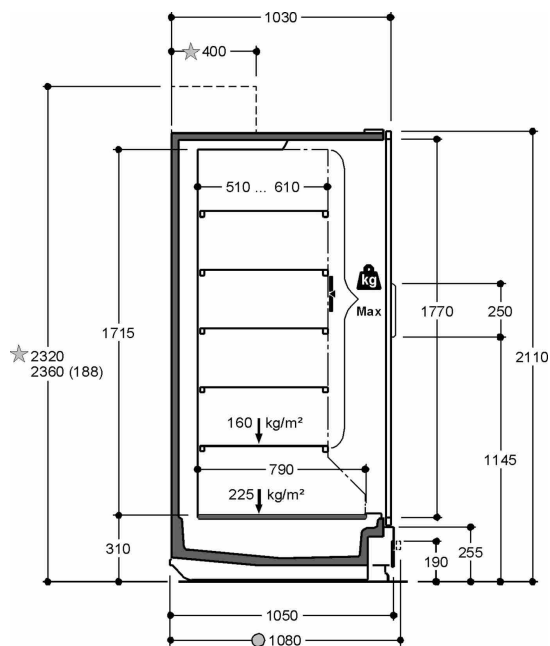


● Option
★ EptaBlue

20 L CLOSED

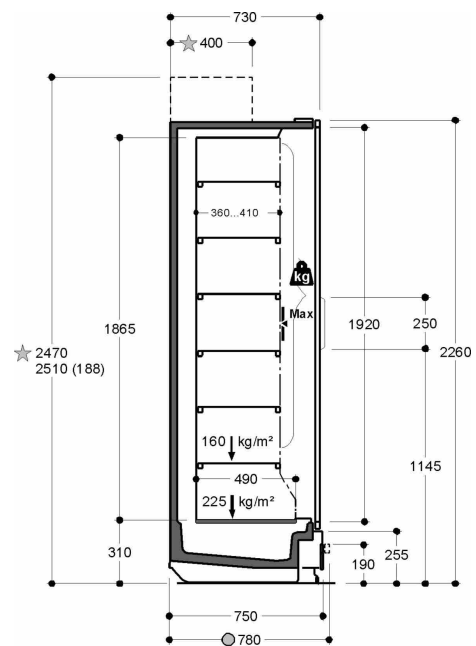


● Option
★ EptaBlue

22 C CLOSED

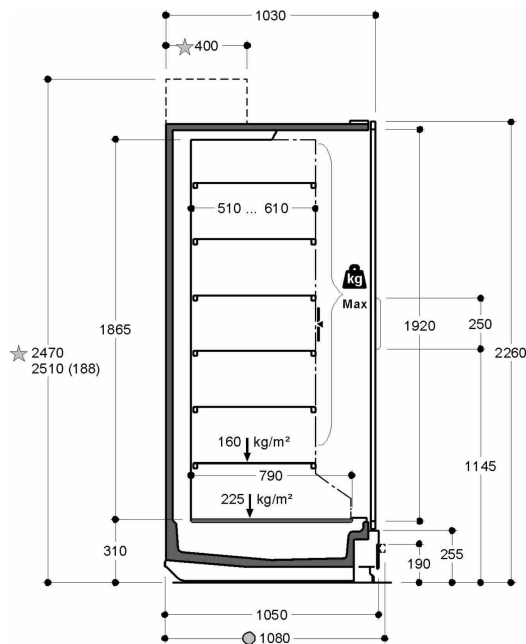

● Option
★ EptaBlue

22 L CLOSED

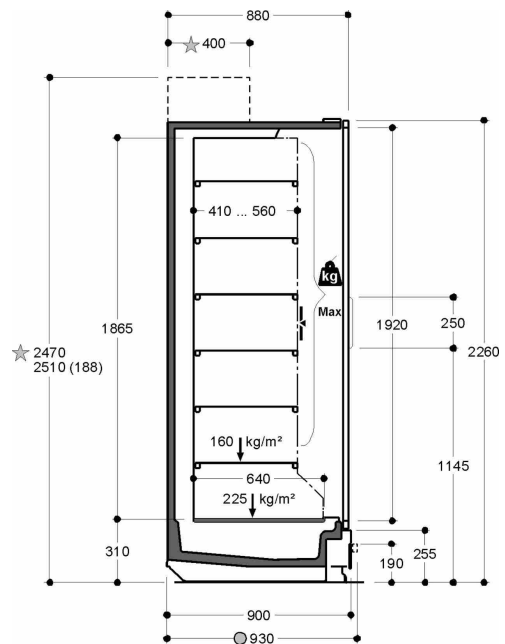

● Option
★ EptaBlue

22 N CLOSED

*The information on the energy class (according to EU regulations 2019/2018 and EU 2019/2024) reported here refers to standard models and precise product configurations and set-ups. The site is based on the information available at the time of publication. As the energy class depends on the specific product configuration, despite the efforts made to ensure the greatest possible accuracy, the real data can differ significantly from the data declared here. For further information, we invite you to consult the European Product Database for Energy Labelling (EPREL) or to contact our Sales Office.